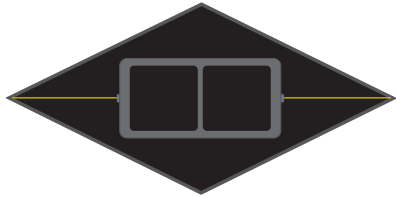


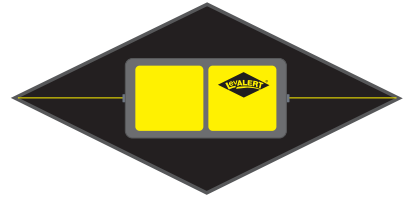


Bin Level Indicators

FULL OR LOW, LEVALERT LETS YOU KNOW.
In one quick glance, know the level of material in your bin.



**REMAINS BLACK
WHEN MATERIAL IS
BELOW INDICATOR**



**ROTATES TO YELLOW
WHEN MATERIAL IS AT
OR ABOVE INDICATOR**

TOP BENEFITS



STAY SAFE

Know your bin levels from the ground. Avoid climbing dangerous bin ladders and stairs.



PLANNING AID

Install indicators to provide a signal on when to stop filling, order product, turn on a motor, etc.



DEPENDABLE

You can trust our bin level indicators to work all of the time, in even the harshest of conditions.
5 year warranty!

POPULAR USES



GRAINS



FEEDS



SEEDS



POWDERS



FERTILIZER



PLASTIC PELLETS



SAND



SALT

COMMON BIN TYPES

WET/DRY HOLDING BINS

OVERHEAD BINS

FEED BINS

SEED BINS

INDUSTRIAL BINS

CORRUGATED OR SMOOTH

IMPORTANT FEATURES



HIGHLY VISIBLE

Premium 3M reflective indicator easily visible day or night from over 300 feet.



NO ELECTRICITY NEEDED

Completely mechanical operation. Automatically resets.



EASY INSTALLATION

Install our bin level indicators in under 5 minutes from the outside of the bin.

PREMIUM MATERIALS

1

Corrosion resistant, UV stable, high strength plastic components. **Won't fade, crack, or discolor.**

2

Premium 3M reflective indicator. **Easily visible from over 300 feet!**

3

Hermetically sealed lens to body. **No condensation.**

4

Moisture-proof bin seal. **Seals indicator to the bin!**

5

Activator frame secures tight to bin wall. **Material does not accumulate behind activator.**

6

Wear-resistant, Teflon coated silicone Activator. **Reduces abrasion & provides years of problem-free use!**





LevALERT

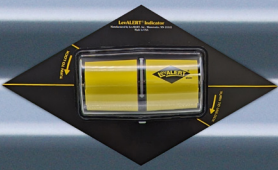

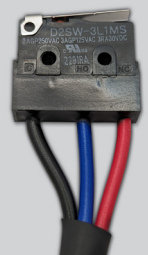
Bin Level Indicators

LevALERT - Model 9700

Top Seller!

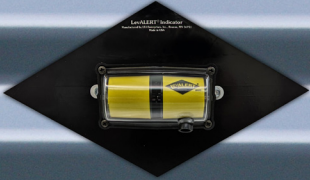


Indicator size twice as large as Model 760! Premium 3M reflective indicator easily visible day or night from over 300 feet.

Activator frame stays tight to bin wall. Ideal for high shear load applications and use with grain spreaders. Teflon Coated Silicone resists sticking to interior of bin wall.

	MODEL 9700			
	Part Number	Activator Size	Weight Range	Description
	9700-7	7" Activator width	10-55 lbs. / cubic foot tolerance	Great for corn, oats, sunflowers, ground feeds, grass seeds
9700-5	5" Activator width	55-100 lbs / cubic foot tolerance	Great for fertilizer, sand, salt, and cement powders	
	OPTIONAL MICRO SWITCH			
	Part Number	Item	Description	
	A91	Micro-Switch	AC/DC, contains both NO/NC circuitry	
A92	Micro-Switch/Relay Kit	Switch plus AC-120 Relay (or DC12)		

LevALERT - Model 760

Activator is Conical shaped and made out of Silicone Coated Fiberglass.

	MODEL 760			
	Part Number	Activator Size	Weight Range	Description
	760	Conical Shape	10-70 lbs. / cubic foot tolerance	Great for grains/feeds
	OPTIONAL MAGNETIC SENSOR			
	Part Number	Item	Description	
	A71	Magnetic Sensor	AC/DC, contains both NO/NC circuitry	
A72	Magnetic Sensor/Relay Kit	Sensor plus AC-120 Relay (or DC12)		

Specifications

Installs on outside of bin, corrugated or flat wall bin styles up to 3/8" in thickness.

Pat. 10,408,659, Pat. 10,557,740, Pat. D848,874

Operates effectively at temperatures between +180F (82C) to -30F (-35C).

5 Year Warranty on Bin Level Indicators.



Manufactured by: LevALERT, Inc. | Minnetonka, MN | levalert.com

Full or low, it lets you know!